




# MacBook Pro 13" Retina Display Early 2015 Trackpad Replacement

Replace the Trackpad in your MacBook Pro 13" Retina Display Early 2015.

Written By: Andrew Optimus Goldberg

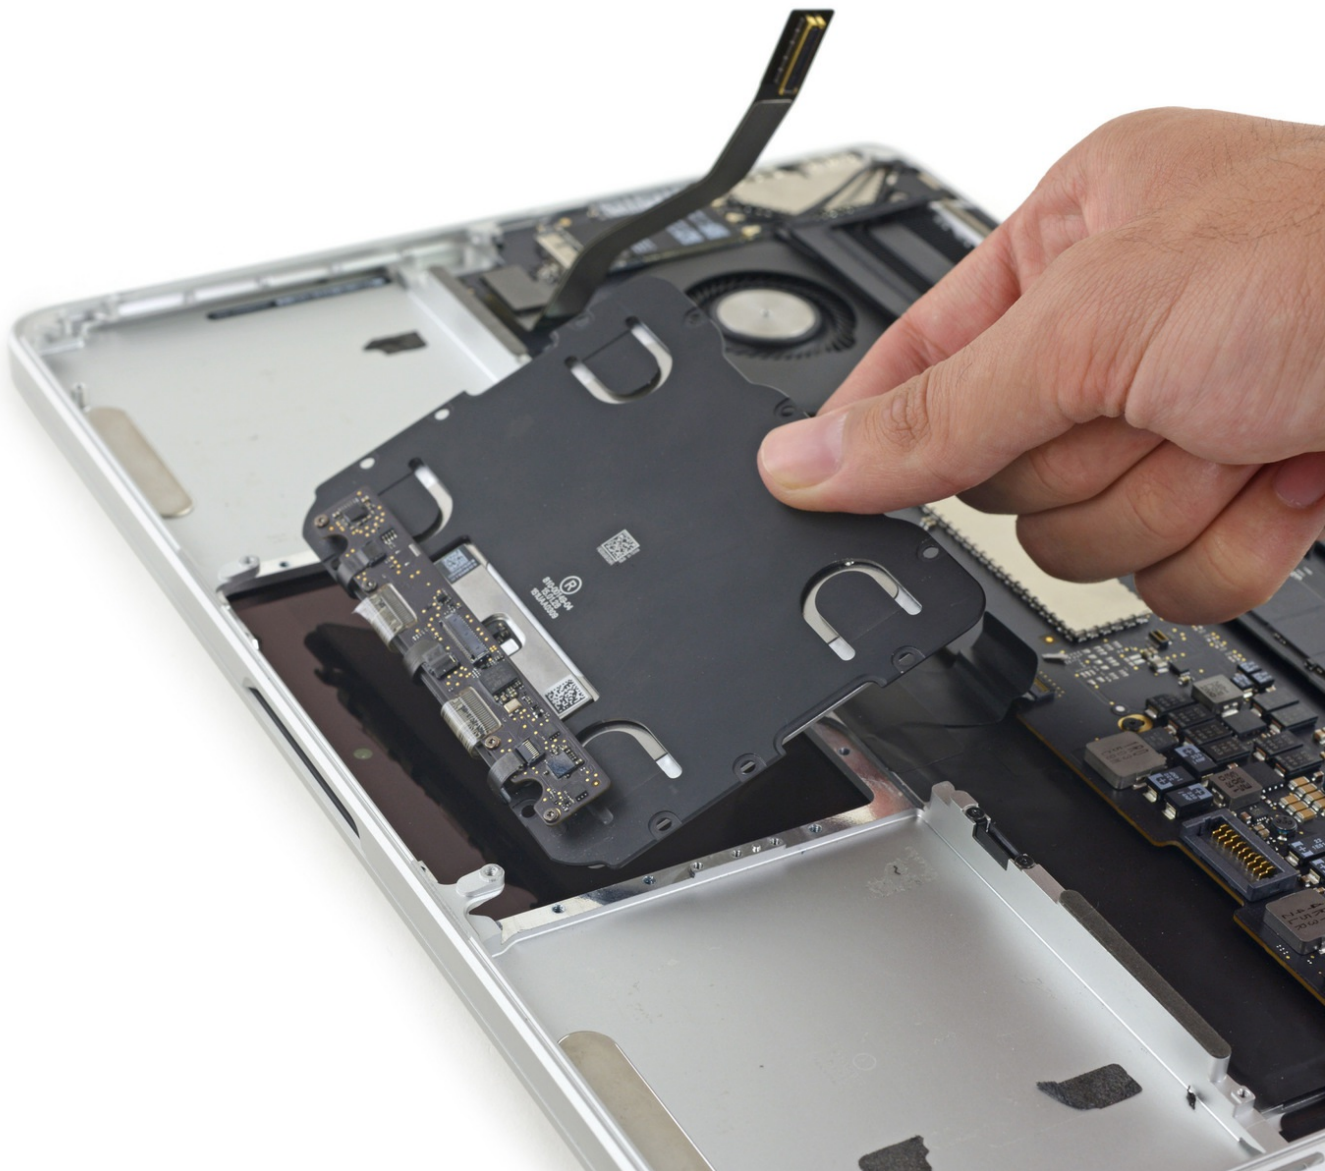

## INTRODUCTION

Does your Force Touch trackpad require a bit more force than it used to? Taptic engine acting up? Use this guide to replace the trackpad in your Early 2015 13" MacBook Pro.



### TOOLS:

- [iOpener](#) (1)
- [P5 Pentalobe Screwdriver Retina MacBook Pro and Air](#) (1)
- [Plastic Cards](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [T3 Torx Screwdriver](#) (1)



### PARTS:

- [MacBook Pro Retina 13" Retina Display Early 2015 Touchpad - Apple PN 923-00518](#) (1)
- [MacBook Pro 13" Retina Display Early 2015 Touchpad cable - Apple PN 821-00184-A](#) (1)

## Step 1 — Lower Case



- Remove the following ten screws securing the lower case to the upper case:
  - Two 2.3 mm Pentalobe screws
  - Eight 3.0 mm Pentalobe screws



## Step 2




- Wedge your fingers between the upper case and the lower case.
- Gently pull the lower case away from the upper case to remove it.


## Step 3



-  The lower case is connected to the upper case with two plastic clips near its center.
-  During reassembly, gently push down the center of the lower case to reattach the two plastic clips.


## Step 4 — Battery Connector

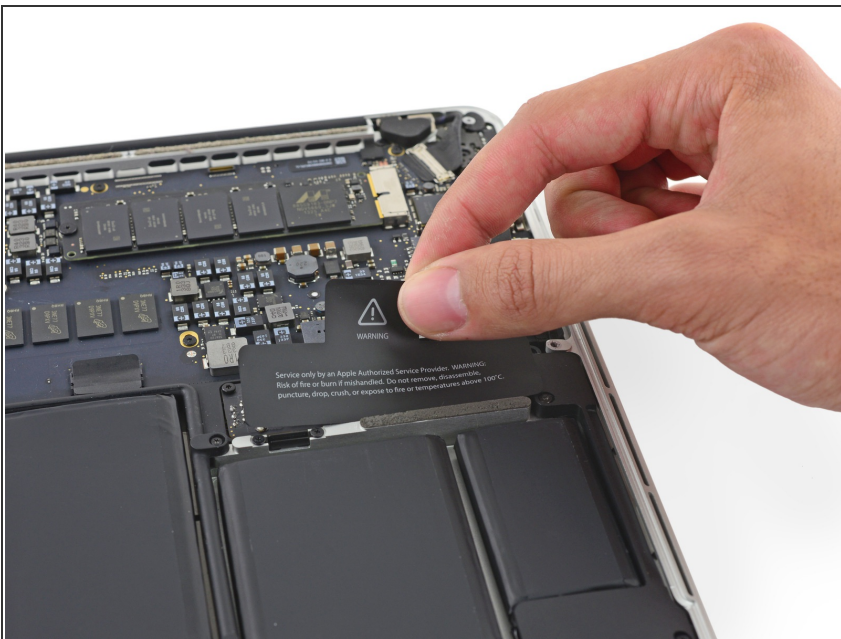

-  If necessary, remove the plastic cover adhered to the battery contact board.



## Step 5

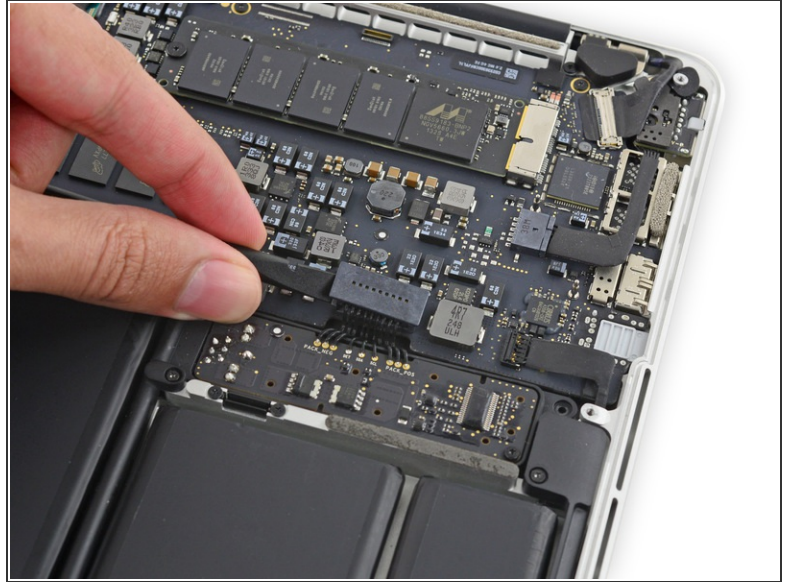

- Use the flat end of a spudger to lift the battery connector straight up out of its socket on the logic board.



⚠ Be sure you lift up only on the connector itself, **not** the socket, or you risk permanent damage to the logic board.

## Step 6



- ☑ Bend the battery connector up out of the way to prevent accidental contact with its socket during your repair.


## Step 7 — Right Speaker

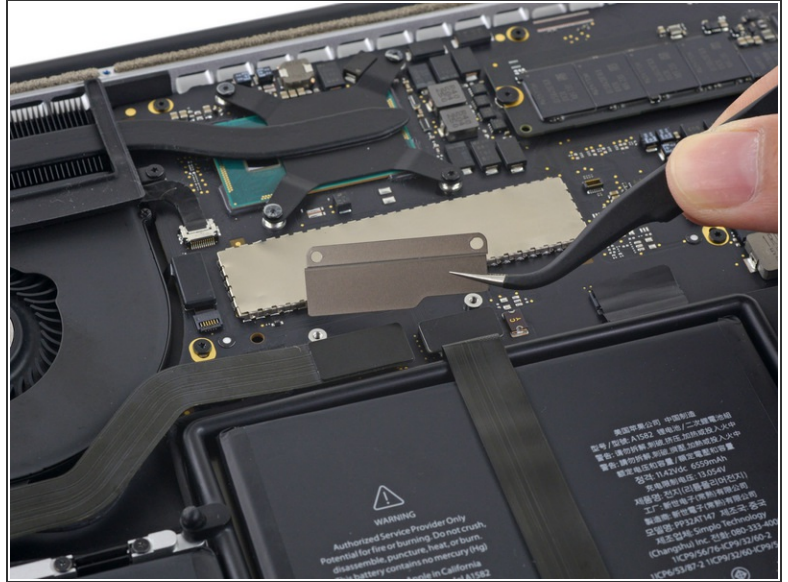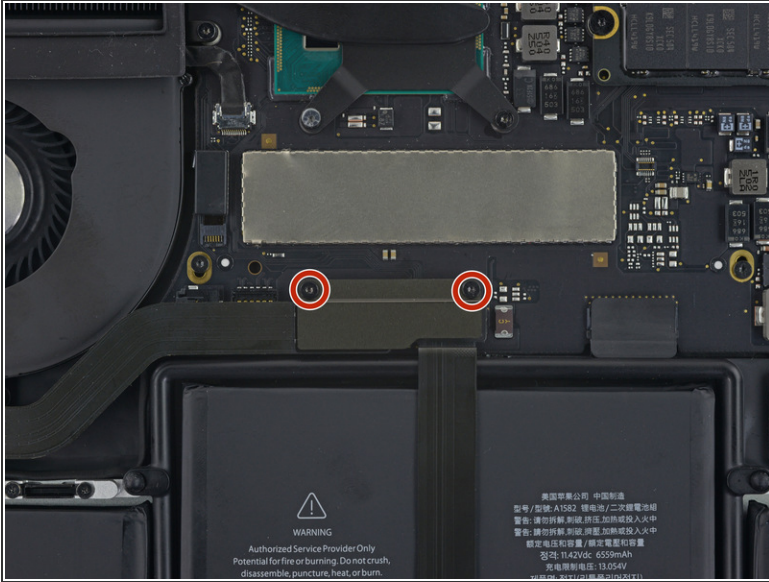

- Remove the two 2.1 mm T5 Torx screws securing the logic board end of the I/O board cable bracket.
- Remove the I/O board cable bracket.




## Step 8

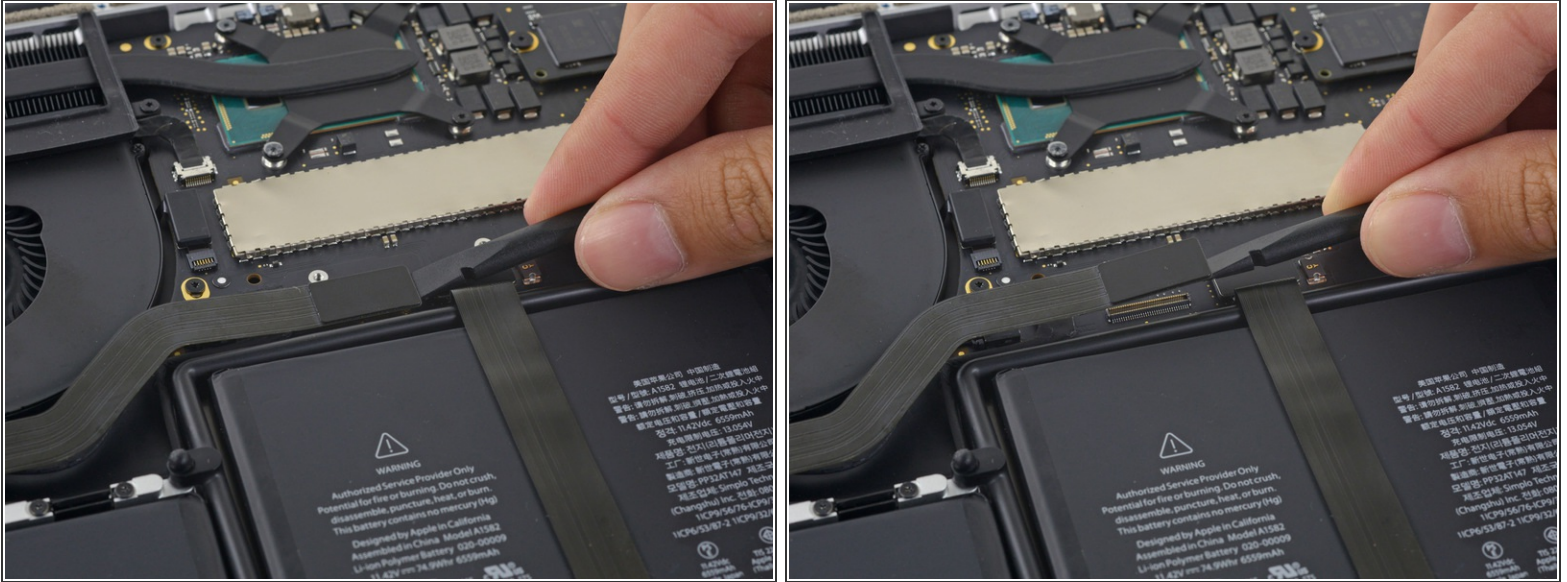

- Use the flat end of a spudger to pop the I/O board connector straight up off its socket on the logic board.

⚠ Be careful to only pry up on the I/O board cable, **not** on the socket itself or you risk damaging your logic board.



## Step 9

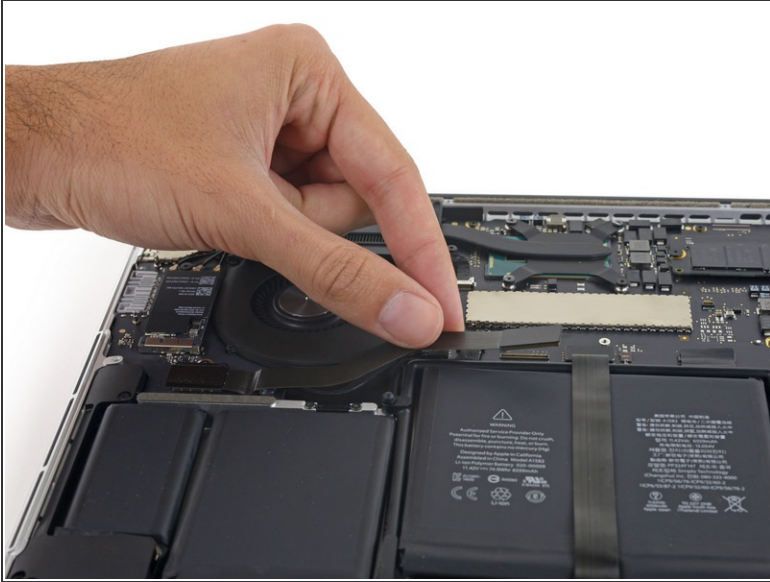

- Lift the logic board end of the I/O board cable straight up to bend it out of the way.

⚠ To avoid damage to the cable, fold only at the bend in the I/O board end of the cable.


## Step 10

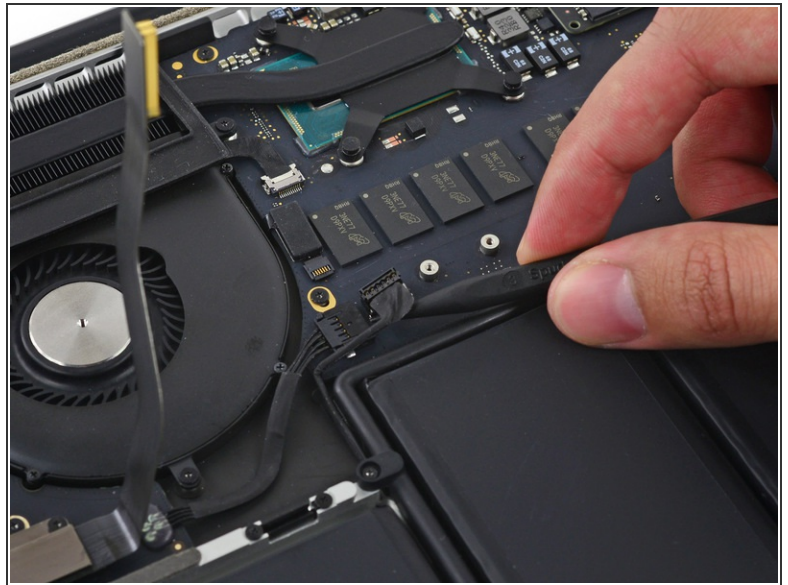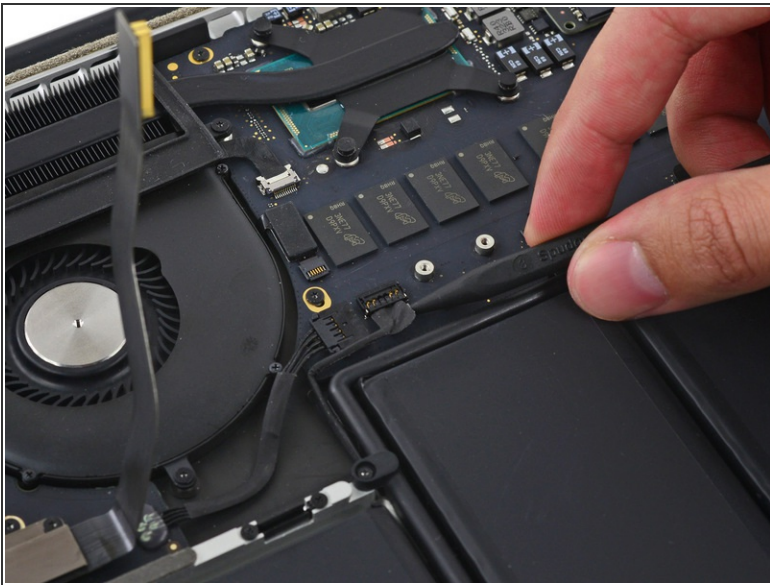

- Carefully tuck the tip of a spudger under the right speaker cable near the connector and lift it up out of its socket on the logic board.




## Step 11

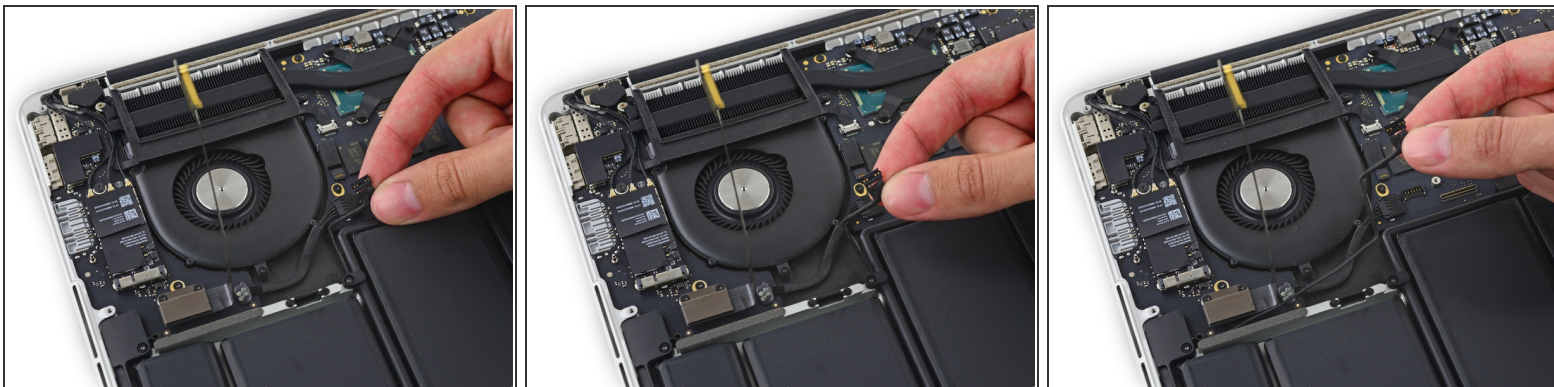


- Carefully peel the right speaker cable off the upper case.

## Step 12

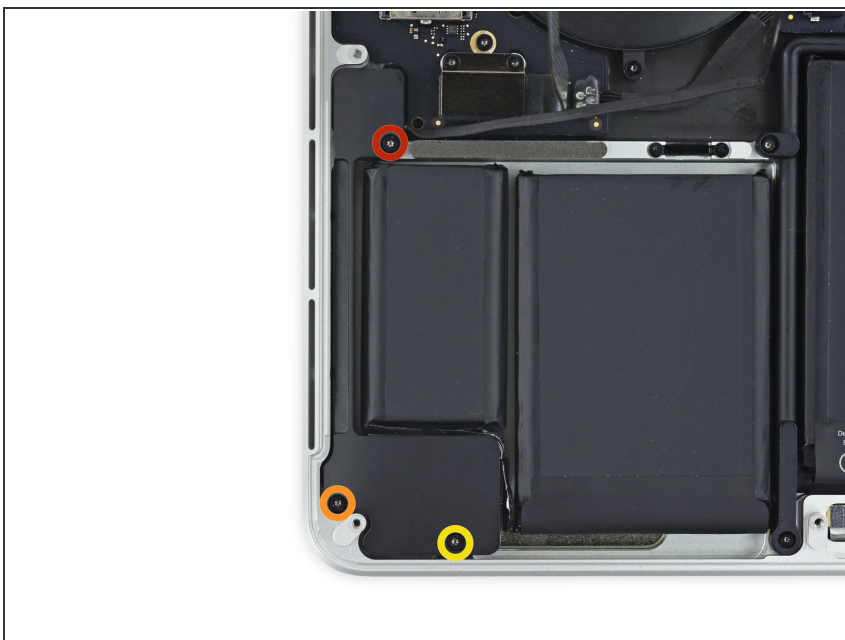


- Remove the following screws securing the right speaker to the upper case:
  - One 5.7 mm T5 Torx screw
  - One 6.5 mm T5 Torx screw
  - One 3.8 mm T5 Torx screw

## Step 13

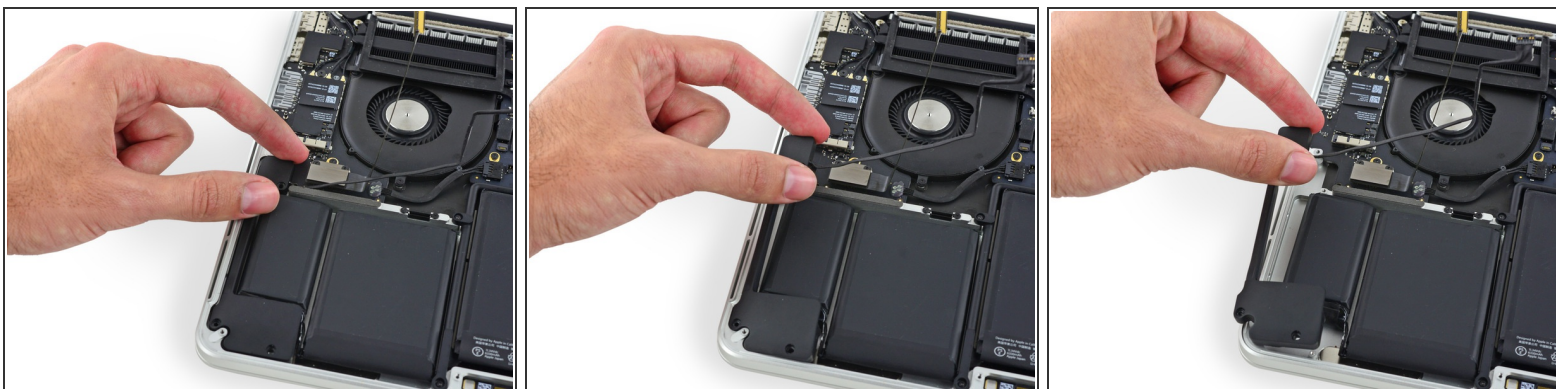

- Lift the right speaker from the cable end and pull it free from the case.


## Step 14 — Left Speaker

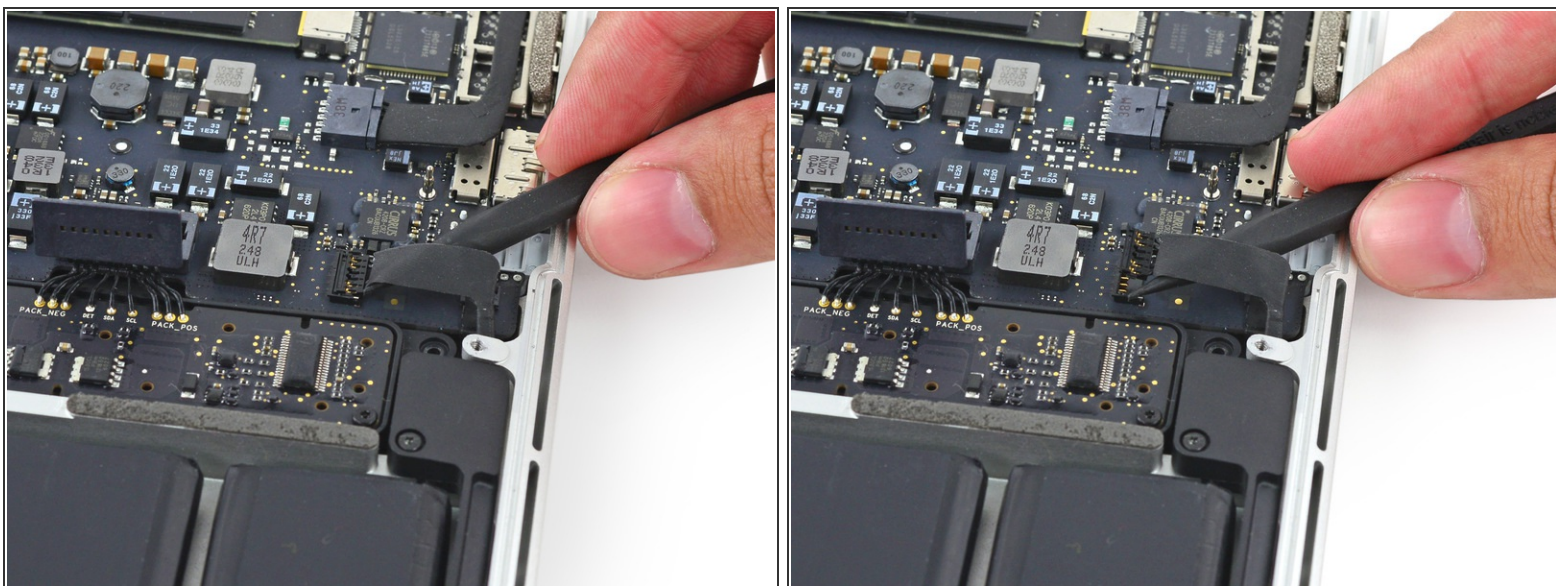

- Insert the tip of a spudger under the left speaker cable near the connector and lift it up out of its socket on the logic board.



## Step 15

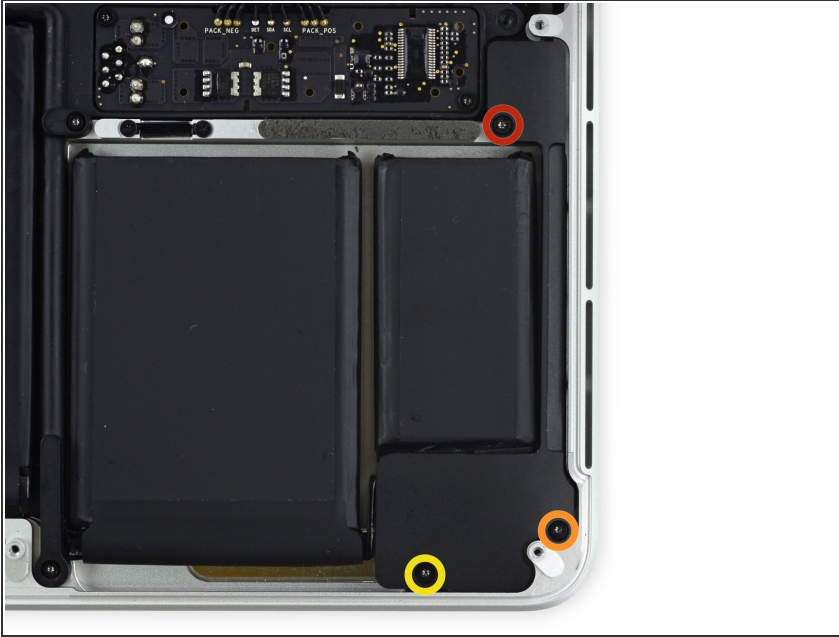

- Remove the following screws securing the left speaker to the upper case:
  - One 5.7 mm T5 Torx screw
  - One 6.5 mm T5 Torx screw
  - One 3.8 mm T5 Torx screw



## Step 16



- Lift the corner of the left speaker up and slide it out the battery to remove it from the upper case.



⚠ Be careful **not** to snag the speaker cable on the screw hole post in the side of the case.

## Step 17 — Trackpad Cable

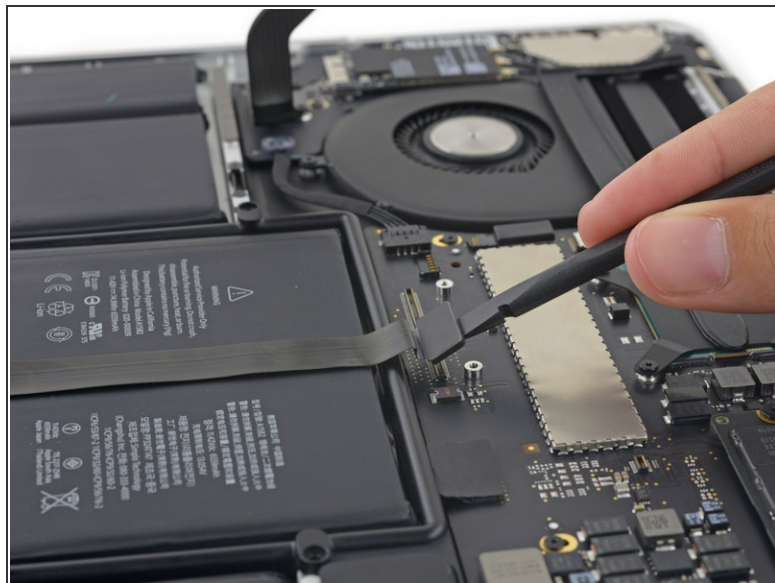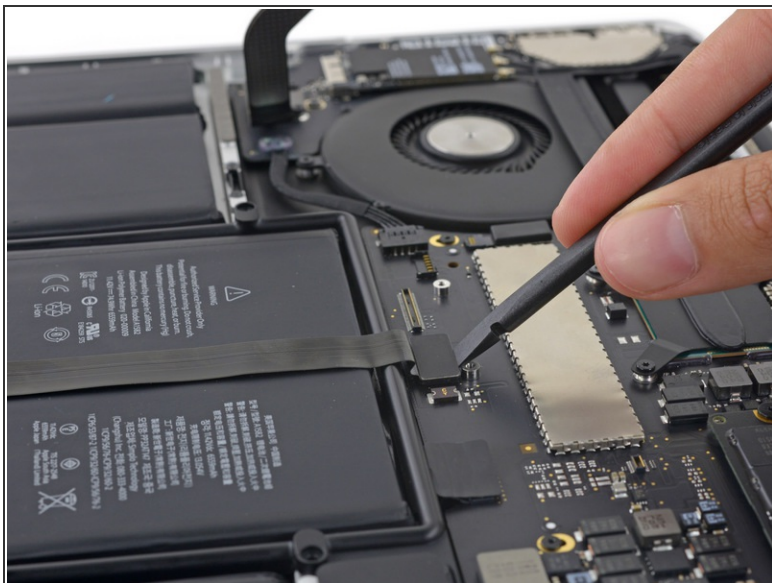

- Use the flat end of a spudger to pop the trackpad connector straight up off its socket on the logic board.

## Step 18

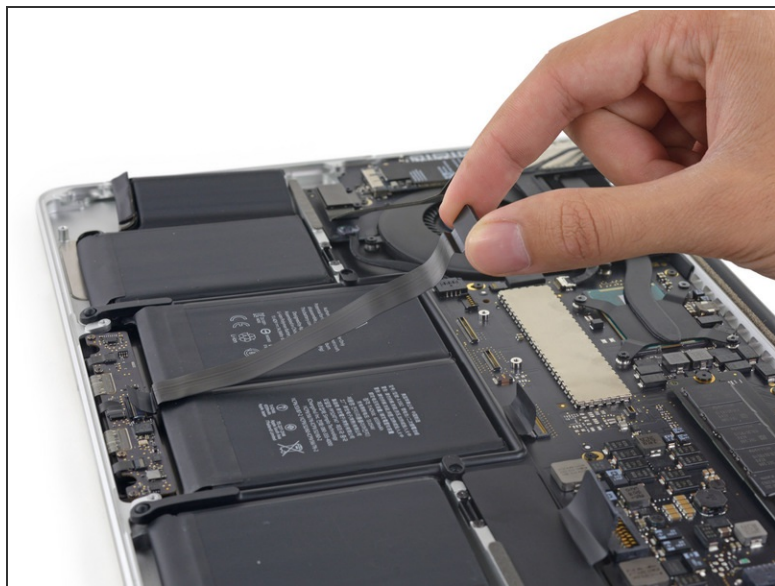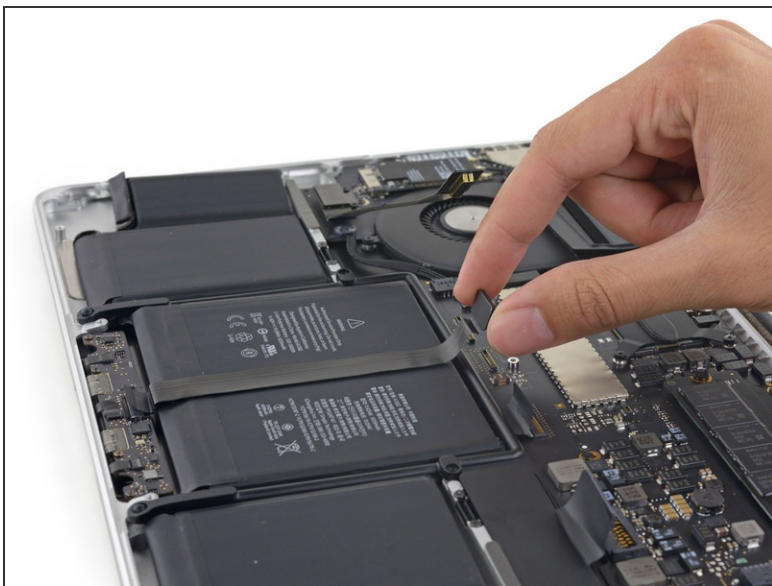

- Lift the trackpad cable up off the battery to separate it from the adhesive securing it.



## Step 19




- ❗ If necessary, peel back any tape covering the trackpad cable connector.
- Use the end of a spudger to flip the retaining tab on the ZIF connector.

## Step 20



- Pull the trackpad cable straight out of its ZIF socket on the trackpad control board.

## Step 21

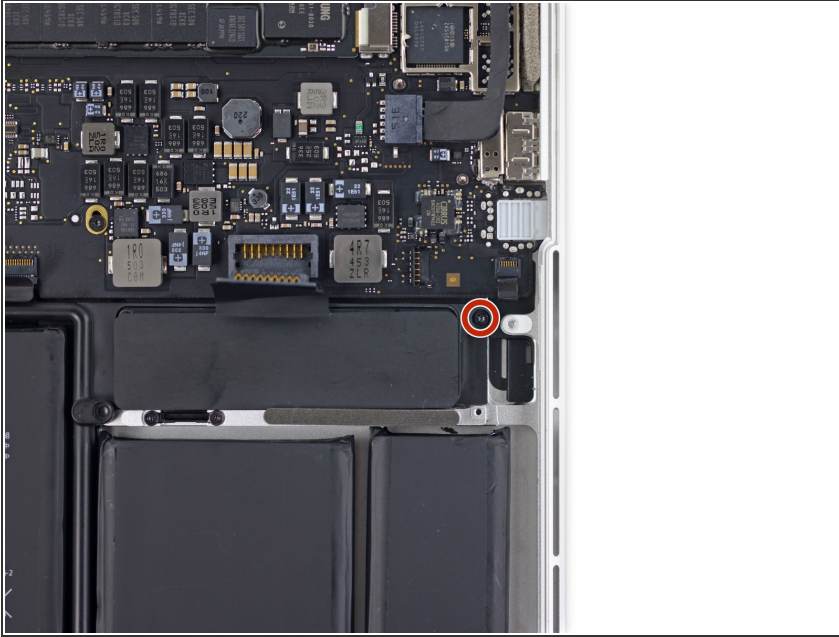

- Remove the single 3.7 mm T5 Torx screw securing the battery board to the upper case.

## Step 22 — iOpener Heating



- ⓘ We recommend that you clean your microwave before proceeding, as any nasty gunk on the bottom may end up stuck to the iOpener.
- Place the iOpener in the center of the microwave.
- ⚠ For carousel microwaves: Make sure the plate spins freely. If your iOpener gets stuck, it may overheat and burn.

## Step 23



- Heat the iOpener for **thirty seconds**.
- Throughout the repair procedure, as the iOpener cools, reheat it in the microwave for an additional thirty seconds at a time.


- ⚠ Be careful not to overheat the iOpener during the repair. Overheating may cause the iOpener to burst.
- ⚠ Never touch the iOpener if it appears swollen.
- ⚠ If the iOpener is still too hot in the middle to touch, continue using it while waiting for it to cool down some more before reheating. A properly heated iOpener should stay warm for up to 10 minutes.



## Step 24




- Remove the iOpener from the microwave, holding it by one of the two flat ends to avoid the hot center.

 The iOpener will be very hot, so be careful when handling it. Use an oven mitt if necessary.

## Step 25 — Battery




-  The liquid adhesive remover provided in your iFixit battery replacement kit can affect the antireflective coating on your MacBook Pro's display.
- To protect your display, place a sheet of aluminum foil between the display and keyboard and leave it there while you work.




## Step 26



 If you have an iFixit battery kit with liquid adhesive remover, it's time to get it prepped.

- Alternatively, if you are using the hot iOpener method, skip the following three steps.

 iFixit adhesive remover contains acetone, a mild skin and eye irritant.

- Wear eye protection when handling and applying the adhesive remover. (Eye protection is included in your kit.)
- **Do not** wear contact lenses without eye protection.
- Protective gloves are also included in your kit. If you are concerned about skin irritation, put your gloves on now.

## Step 27




- Open your container of adhesive remover.
- Fill the syringe included in your kit with a small amount (approximately 1-2 milliliters) of adhesive remover.
- ❗ It's best to fill the syringe with no more than about 1-2 milliliters of adhesive remover at a time, so as to avoid accidentally applying too much.
- Refill your syringe as needed throughout the rest of this procedure.

## Step 28



- Apply a small amount of adhesive remover (approximately 1 ml) evenly under the edge of the rightmost battery cell.
- Wait 2-3 minutes for the liquid adhesive remover to penetrate underneath the battery cell before you proceed to the next step.

## Step 29

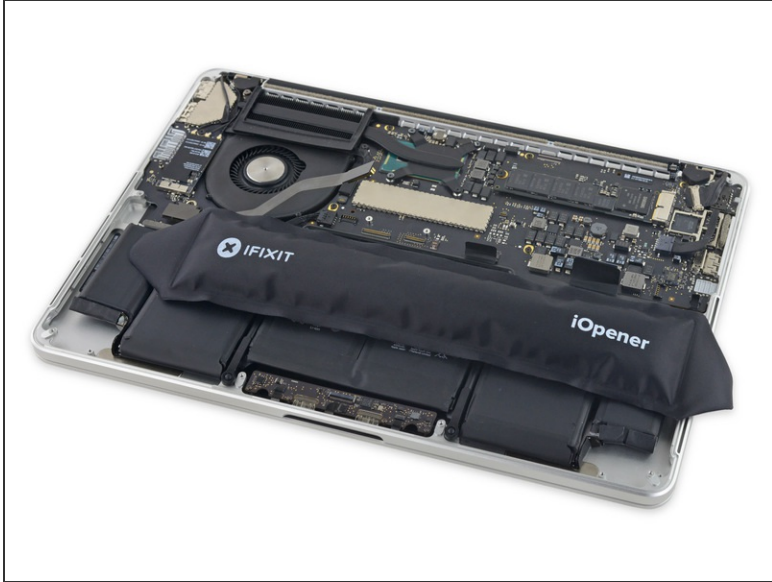


**i** If you don't have a liquid adhesive remover, you'll be using a [hot iOpener](#) to warm and soften a section of the adhesive securing the battery to the upper case, and then carefully prying at that point.

- Use the hot iOpener to cover half of the right-most battery cells.
- After about a minute, reheat the iOpener and move it to cover the other half of the right-most battery cells.




## Step 30




- Push a plastic card between the right-most battery cell and the upper case, cutting the adhesive between the two.
-  Throughout this procedure, be careful not to damage any of the battery cells with your tools. A damaged lithium-ion battery may leak dangerous chemicals and/or catch fire. Use only plastic pry tools.
- When using the hot iOpener method, if you encounter significant resistance to prying, stop and use the iOpener to reheat the section you're working on.

## Step 31

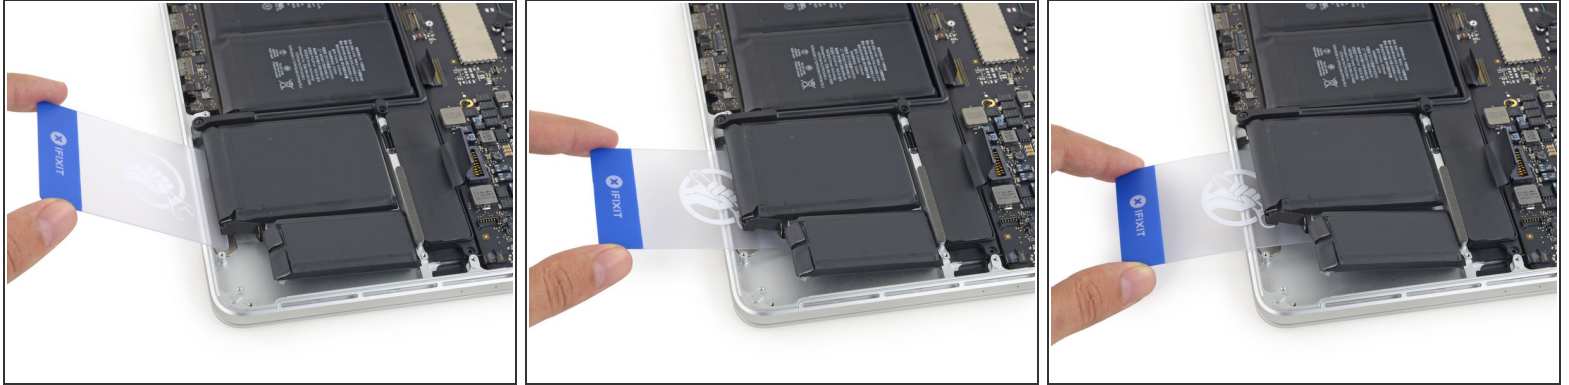


- Repeat this procedure with the adjacent battery cell:
  - Apply a small amount (about 1 ml) of liquid adhesive remover under the battery cell, and wait 2-3 minutes for it to penetrate and soften the adhesive.
  - Alternatively, re-heat this section with your iOpener if needed.
  - Push a plastic card about an inch between the battery cell and the upper case, and slowly pry the cell up to separate all of the adhesive.

## Step 32

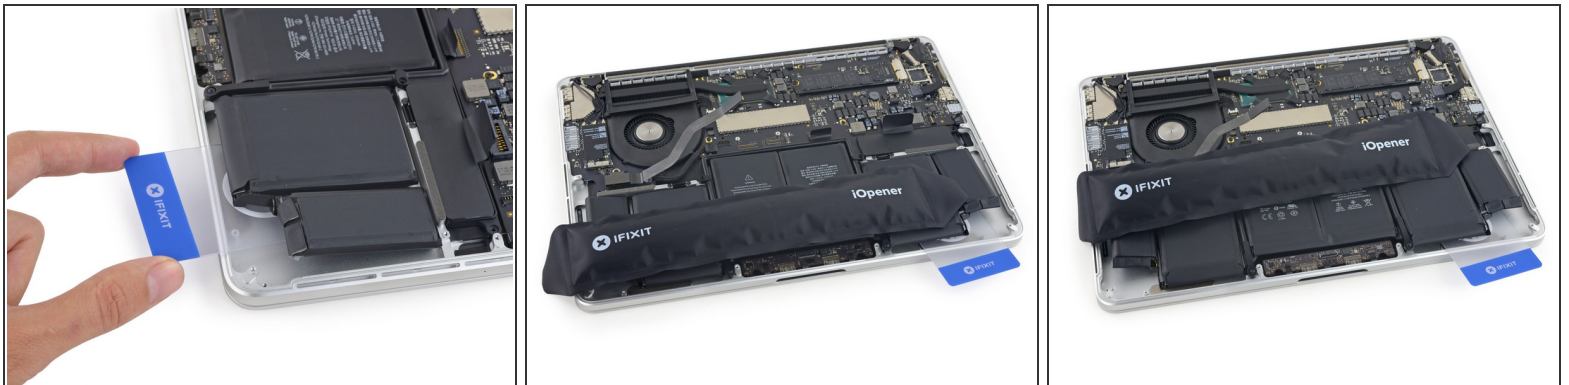

- Temporarily leave your plastic card underneath the two rightmost battery cells to prevent them from re-adhering to the upper case.
- If using an iOpener, reheat it and reapply it, this time to the left-most battery cells.
  - ❗ Again, leave the iOpener in each position for about a minute, reheating in between, to heat each half of the left-most battery cells.

## Step 33

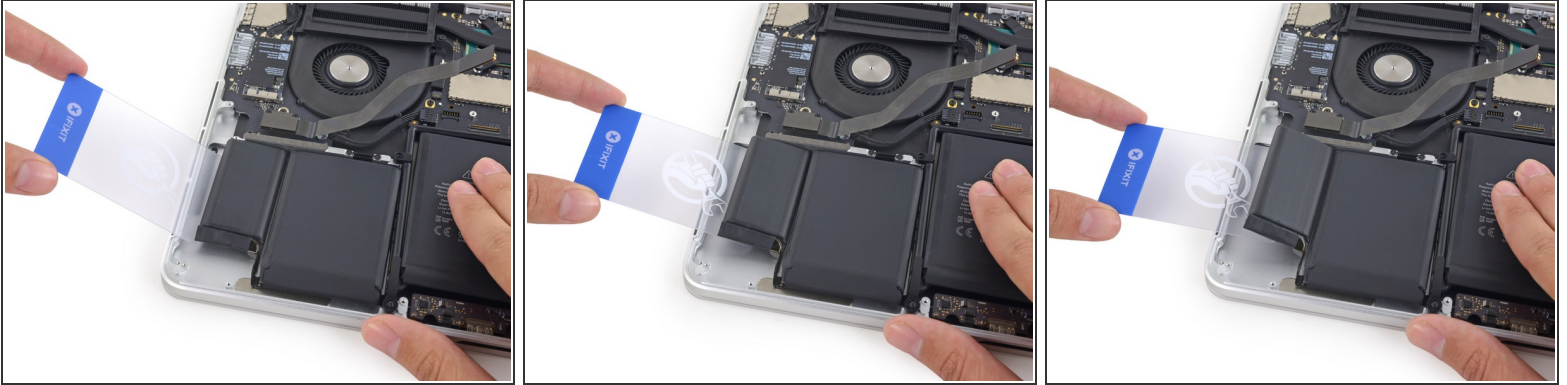

- Repeat the above procedure to separate the two leftmost battery cells from the upper case.
- Remember to apply a small amount (about 1 ml) of adhesive remover to each battery cell, and wait 2-3 minutes for it to penetrate and soften the adhesive.
- Use a second plastic card to separate the two leftmost battery cells from the upper case.

## Step 34



- ⓘ Continue to repeat the prying procedure.
- Insert the plastic card between the second left-most battery cell and the upper case to cut the adhesive joining the two, and pry the cell up from the case.



## Step 35




- Leave the second card in the corner between the two left cells.
- If using an iOpener, reheat it and apply it to the central battery cells.
  - As before, leave the iOpener in each position for about a minute, reheating in between, to heat each half of the center cells.
- In the following steps, you can either use a third card, or the card from the right corner. The right corner adhesive should be dry/cool enough that the cells can easily be pulled up again when needed.

## Step 36




- If using liquid adhesive remover, apply another 1 milliliter or so under each of the final two, middle cells.
- ⓘ It may help to elevate one side of your MacBook Pro a few inches so that the adhesive remover flows in the correct direction, underneath the battery cells. You can use a sturdy book or foam block to prop up one side of your MacBook Pro while you work.
- Allow 2-3 minutes for the adhesive remover to penetrate before you continue.
- Gently folding the right-most battery cells out of the way, insert a plastic card under the right center cell.
- Push the card in about half of its length to cut the adhesive holding the battery cell to the case.
- ⚠ Be sure to avoid the trackpad control board. Aim the card up toward the logic board, where the adhesive is.
- Leave the card in place to keep the adhesive from re-sealing.

## Step 37

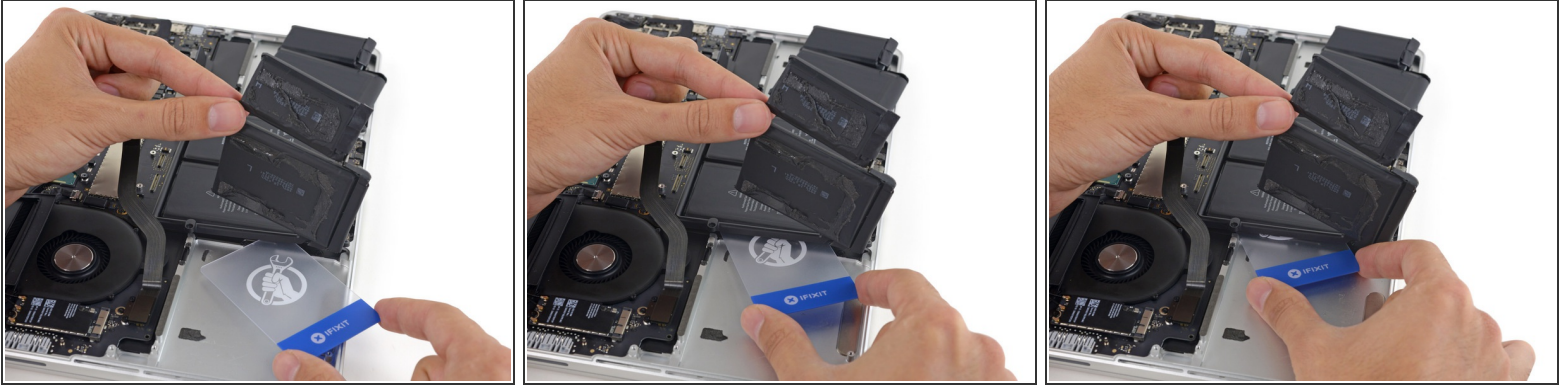

- Repeat the same procedure for the last remaining battery cell.
- Holding the outer cells out of the way, insert the plastic card about halfway under the left center battery cell, avoiding the trackpad board.


## Step 38

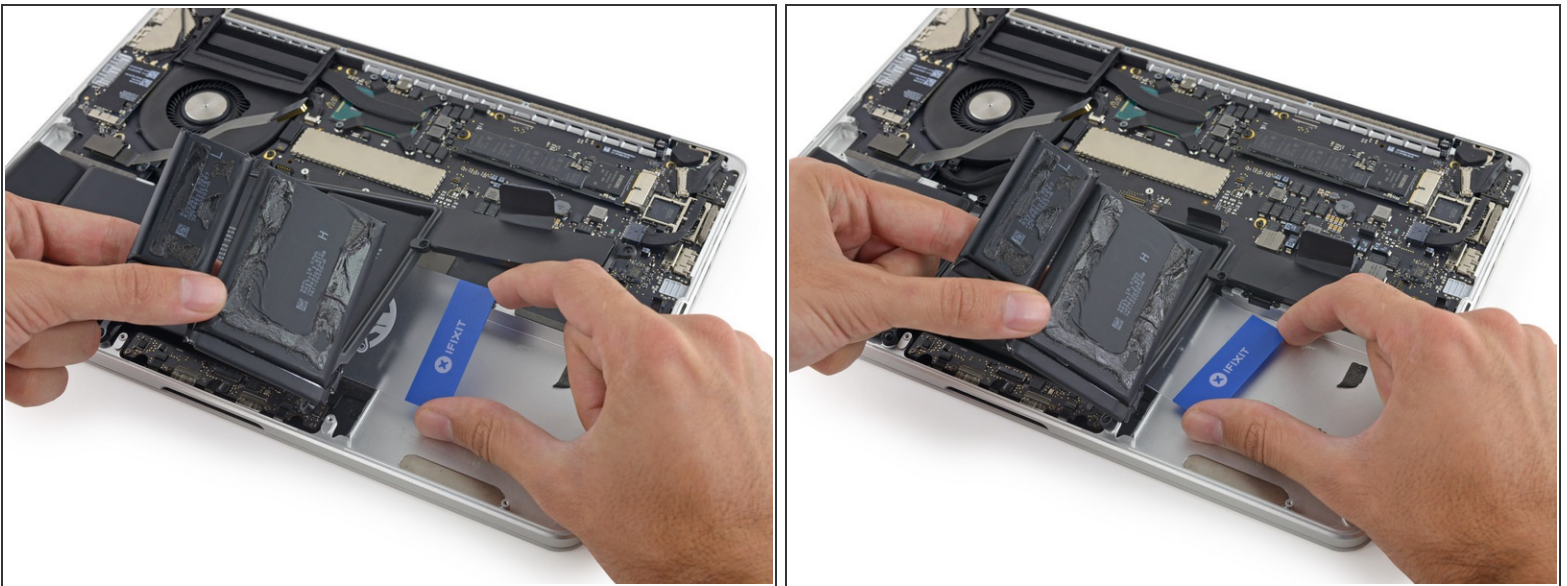

- Return to the card beneath the right-center cell, and twist it to separate the entire battery from the upper case.
- ❗ By now you should have cut all of the adhesive securing the battery to the upper case, and it should come out freely.
  - If it does not come out easily, you may need to reheat the iOpener and apply it to the stuck areas, and then continue gently cutting the adhesive with the plastic cards.




## Step 39

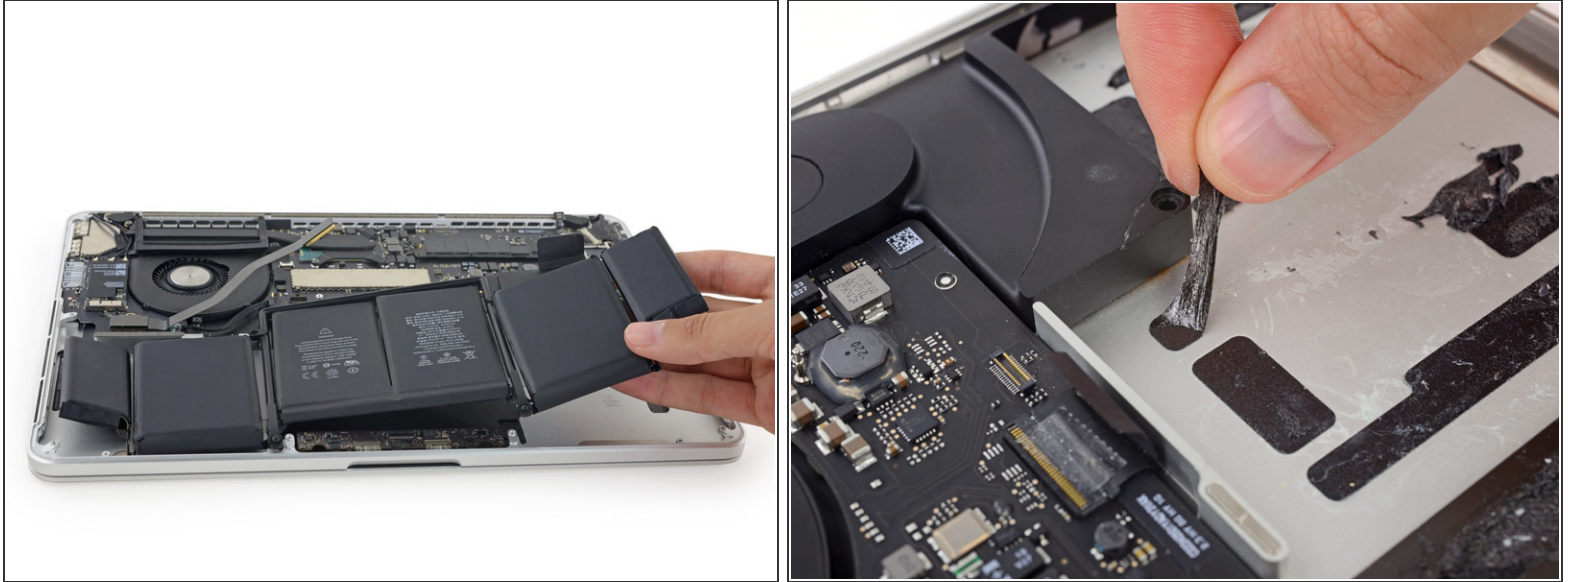


- Remove the battery.
- ☑ Before installing your new battery, remove all the old adhesive from the MacBook Pro's case.
  - With a little luck, you can slowly pull out each strip of adhesive with your fingers.
  - Otherwise, soak each section of adhesive with a bit of adhesive remover for 2-3 minutes, and then scrape it out with an opening pick or one of the other tools in your kit. This can take quite a bit of work, so be patient.
  - Mop up any remaining adhesive remover and give your MacBook Pro a few minutes to air dry.
- ☑ The replacement battery included in your iFixit kit comes with adhesive pre-installed. Test the battery's fit and alignment carefully before peeling off the film covering the adhesive, and then press each cell firmly into place. If any additional films/liners are present that weren't on your original battery, remove them now.
- Calibrate your battery before using it: allow it to drain overnight, then charge it to 100% and drain it again until your MacBook Pro shuts down automatically. Charge it again and use it normally.
- If you notice any unusual behavior or problems after installing your new battery, you may need to [reset your MacBook Pro's SMC](#).

## Step 40 — Trackpad

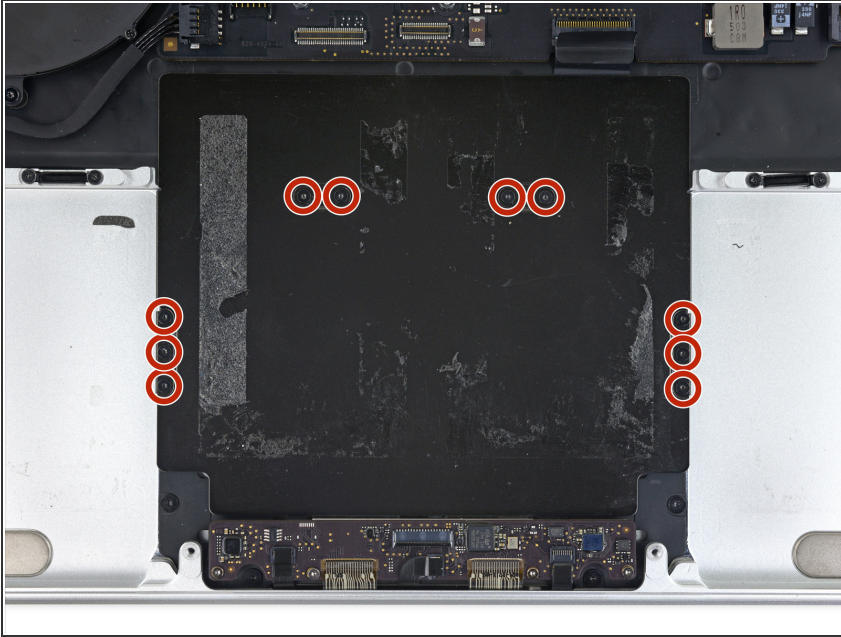


- Remove the ten 2.8 mm T3 screws securing the trackpad cover plate to the upper case.

## Step 41

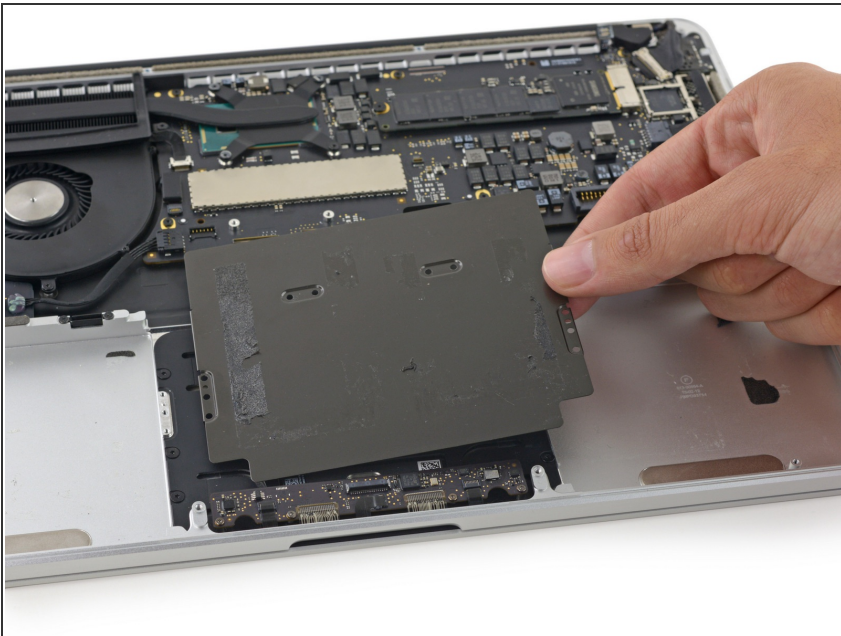




- Remove the trackpad cover plate.

## Step 42

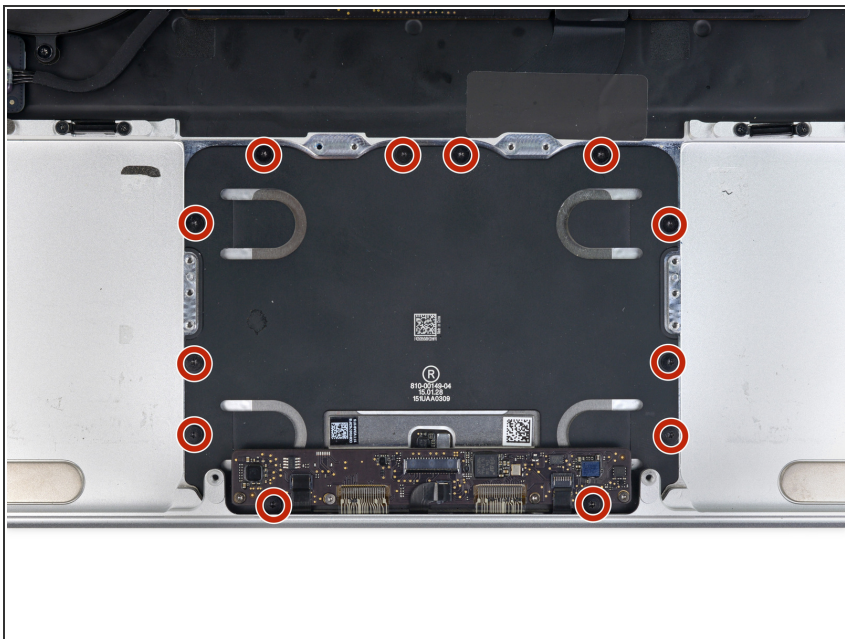

- Remove the twelve 2.4 mm T5 screws securing the trackpad to the upper case.

## Step 43

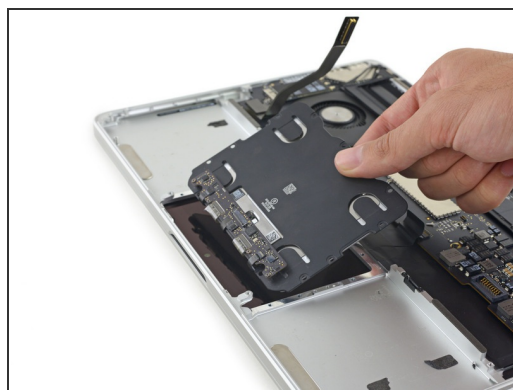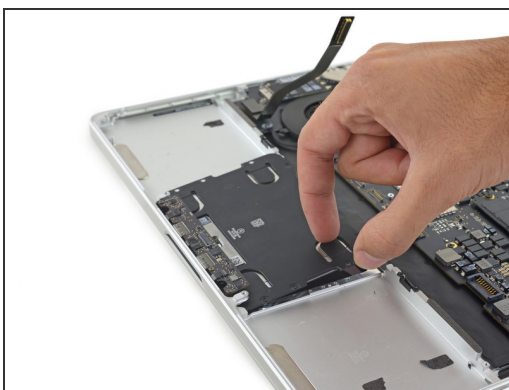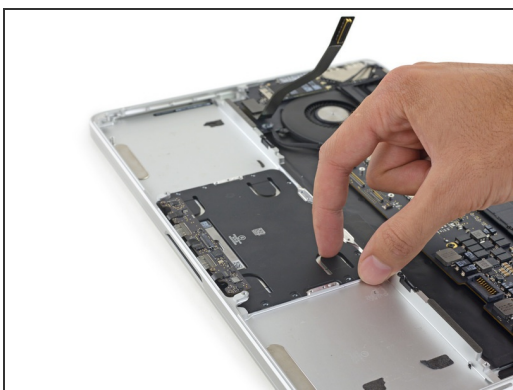

- Lift up and remove the trackpad from the upper case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-12-08 08:05:45 AM.